



# XTS

ENCLOSED & GASKETED ACRYLIC TUBE

## XTS: EXTREME ENCLOSED AND GASKETED FOOD SERVICE HOSE-DOWN


Energy efficient and rugged enough to be used in food processing or corrosive salt environments.

### VERSATILE AND RUGGED

A sturdy, IP66-rated, 6" clear acrylic housing makes the energy-efficient XTS rugged enough for tough assignments like food processing or corrosive salt environments. XTS can survive frequent hose-down or heavy ice buildup without damage. Easy-to-aim, four-foot or eight-foot housings with T8 or T5HO lamps make finding the right lumen package simple.

### ENERGY SAVING

With the cost of electricity and peak demand charges soaring, the right choice in facility lighting becomes increasingly critical. XTS employs electronic T8 and T5HO fluorescent technology in an ultra-efficient luminaire, saving up to 64% when replacing probe start metal halide.

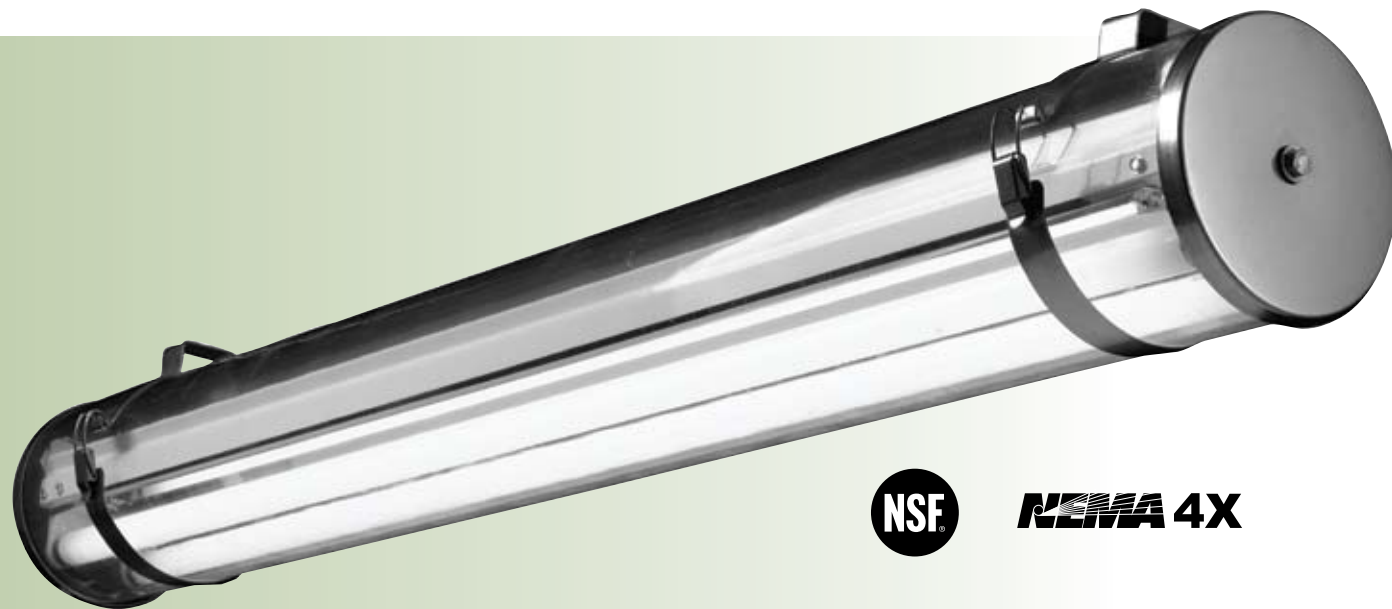

### WIRED TIGHT

XTS ships standard with 6' of 16/3 SJT cord installed at one end. An optional 6' or 12' Mini-Quick Hubbell cord set with strain relief receptacle can be installed with a straight female plug at one end and stripped leads at the other.



### SEALED TIGHT


XTS is rated IP66, so it can be hosed down, essential to simplified maintenance in food processing, agriculture and countless other applications. Brushed stainless steel endcaps bolt into the fixture at each end, compressing silicon gasket seals securely onto the tube. O-rings and special washers seal out dust and liquids. Plus, it's round, so liquids roll right off.

### EASY TO INSTALL; EASY TO MAINTAIN


Fully adjustable, stainless steel strap clamps allow tool-less, two-point suspension anywhere along the fixture's length. The optional Mini-Quick Connect cord set makes swapping out fixtures fast, with no disruption to production.

## ENERGY EFFICIENT

### ENERGY SAVINGS

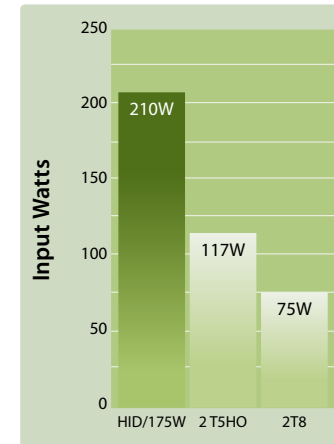


### DELIVERED LUMENS

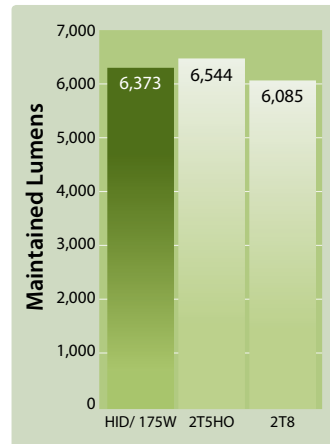


### VERSUS 175W MH

The 4' 2-lamp T8 XTS fixture saves two-thirds of the energy and delivers 95% of the lumens compared to 175 watt probe start metal halide.

### ENERGY SAVINGS

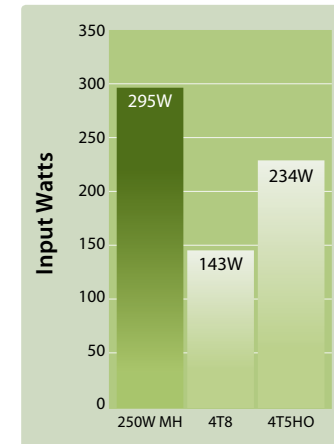

### DELIVERED LUMENS

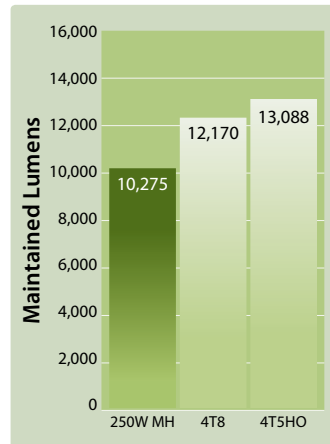

### VERSUS 250W MH

Replacing a 250 watt probe start metal halide system with an 8' XTS 4-lamp T8 (2-lamp in cross section) makes sense. The 8' unit uses half the energy and delivers 15% more usable lumens. The 8' source is ideal for aisleway applications, reducing glare as compared to point source HID.

## ORDERING GUIDE

### EXAMPLE XTS4-254-M4R-EPU-F5841-F3C6WT

XTS		- 2		-		-		U		-	
MODEL	NO. OF LAMPS	REFLECTOR	BALLAST	VOLTAGE	OPTIONS	SIZE	LAMP TYPE	LAMPS INSTALLED			
XTS Enclosed and Gasketed Acrylic Tube, Severe Environment	2 Two	M4R 95% Reflective Specular Aluminum (Narrow Beam) GW Gloss White (Wide Beam)	E (1) 2-Lamp Electronic T8, Instant Start 4E (1) 4-Lamp Electronic T8, Instant Start EHL (1) 2-Lamp Electronic T8 High Light Output, Instant Start 4EHL (1) 4-Lamp Electronic T8 High Light Output, Instant Start EP (1) 2-Lamp Electronic T5, Programmed Start 4EP (1) 4-Lamp Electronic T5HO, Programmed Start EPHL (2) 2-Lamp Electronic T8, High Light Output, Programmed Start 4EPHL (1) 4-Lamp Electronic T8 High Light Output, Programmed Start	U 120V-277V	F3C6WT 6' Mini-Quick cord set. Threaded male receptacle, strain relief installed in end cap. Straight threaded female plug one end of cord, other end has stripped leads ready for feed installation F3C12WT 12' Mini-Quick cord set. Threaded male receptacle, strain relief installed in end cap. Straight threaded female plug one end of cord, other end has stripped leads ready for installation GLR Fast Blow Fuse GMF Slow Blow Fuse NYC NYC Compliant NYCU NYC Compliant, Union Label	4 4' 8 8'	32 4', T8: 32, 30, 28 or 25 Watt 54 4', T5HO: 54 or 51 Watt	F0841 T8 32W Lamps Installed, 80 CRI, 4100°K F5841 T5HO 54W Lamps Installed, 82CRI, 4100°K			

\*For NEMA premium ballast, add prefix N. e.g., NEPHL.

- BIL**     **Bi-Level Luminaire**  
*3-lamp fixture designed to maximize energy savings in low occupancy areas such as stairwells and storerooms.*
- EMI**     **EnergyMax® Intersect™ Full Distribution Luminaire**  
*2-lamp, energy efficient, louvered luminaire designed to provide full distribution and tremendous energy savings.*
- EMS**     **EnergyMax® Stratus Energy Saving Architectural Recessed Indirect Luminaire**  
*2-lamp, energy efficient, recessed indirect luminaire tuned to meet strict Lighting Power Density requirements.*
- EMX**     **EnergyMax® Parabolic Energy Saving Parabolic**  
*A system of tuned components designed to provide the perfect balance between light output and energy conservation.*
- EPC**     **e-poc® Full Distribution Luminaire**  
*2-lamp, energy efficient, lensed luminaire with contemporary styling, full distribution, and huge energy savings.*
- LHV**     **VersaBay® Fluorescent High Bay**  
*The new industry standard for fluorescent high bay lighting with Advanced Thermal Management.*
- MB/MC**   **Morph® Fluorescent Exterior Area Lights**  
*T5HO luminaires with unprecedented energy savings and light control.*
- RKT/  
RKS/  
RKSR**     **RKT/RKS/RKSR Troffer and Industrial Striplight Retrofit Kits**  
*Retrofit kits to update existing lighting to meet today's lighting needs and lower energy costs*
- XFSW**     **XFSW Severe Fiberglass Low/High Bay**  
*A 4- or 6-lamp IP67 Rated, NSF Rated, and 5VA fire rated low/high bay ideal for cold temperatures.*
- XTS**     **XTS Enclosed and Gasketed Acrylic Tube, Severe Environment**  
*2-lamp, energy-efficient, enclosed and gasketed lighting suitable for wet locations.*
- ZPT**     **Zero Plenum® Troffer High Efficiency Architectural Luminaire**  
*High performance, ultra-low profile luminaire that significantly reduces energy costs.*

## Columbia LIGHTING

701 Millennium Blvd. Greenville, SC 29607  
Tel 864.678.1000 Fax 866.898.0131  
[www.columbialighting.com](http://www.columbialighting.com)

CO1049 06/10

Copyright © 2010 Columbia Lighting, a division of Hubbell Lighting, Inc. All rights reserved.  
Because of continuing product improvement programs, Columbia Lighting reserves the right  
to change specifications without notice.

Printed on mixed fiber paper (20% well-managed forests, 80% post consumer).



Hubbell Lighting, Inc.