

# 6PA

## Specification Grade Air Handling Troffer

LENSED TROFFERS







### FEATURES

- Contoured housing maximizes uniform photometric performance
- Mitered corners on door presents a clean appearance
- Painted parts are treated with a five stage phosphate bonding process and finished with a baked white enamel; door is painted after fabrication
- Mechanical light trap prevents light leaks
- Black reveal with full air handling capabilities
- Doors are retained by spring steel latches and hinge from either side
- Allows future changeover of the lens to a 3" parabolic louver
- UL listed 1598, cUL or CSA. Damp Location standard

### ORDERING INFORMATION

6PA									
MODEL	NO. OF LAMPS	CEILING TYPE	DOOR	AIR HANDLING	AIR CONTROL	VOLTAGE			
6PA Specification Grade Air Handling Troffer	1 One 2 Two 3 Three 4 Four 6 Six See Product Availability table below.	<b>G</b> Grid Overlap Flange <b>F</b> Flange <b>M</b> Modular Fit-in Trim <b>SG</b> Slot Grid	<b>FA</b> White Flush Aluminum <b>RA</b> White Regressed Aluminum	<b>S</b> Static <b>A</b> Air Supply/Return Vanes <b>H</b> Heat Extract <b>C</b> Combination Supply/Extract	<b>Blank</b> None <b>V</b> Air Supply/Return Vanes <b>D</b> Heat Extract Dampers <b>VD</b> Supply/Return Vanes & Heat Extract Dampers	<b>U</b> 120V-277V <b>347</b> 347V			
SIZE	LAMP TYPE	SHIELDING	BALLAST	OPTIONS					
22 2' x 2'	14 2', T5: 14 Watt	<b>A12</b> Pattern 12 Acrylic Lens	<b>NOTE:</b> See Technical Section for other ballast options. <b>E</b> Electronic T8, Instant Start <b>3E</b> 3-Lamp Electronic T8, Instant Start <b>4E</b> 4-Lamp Electronic T8, Instant Start <b>24E</b> (1) 2-Lamp and (1) 4-Lamp Electronic T8, Instant Start <b>EP</b> Electronic T5 or T8, Programmed Start <b>3EP</b> 3-Lamp Electronic T5HO or T8, Programmed Start <b>4EP</b> 4-Lamp Electronic T5HO (N/A 347V) or T8, Programmed Start <b>ETT</b> Electronic Twin Tube, Instant Start <b>EPTT</b> Electronic Twin Tube, Programmed Start	<b>F0735</b> 35K 75CRI T8 Lamps Installed <b>F0835</b> 35K 82CRI T8 Lamps Installed <b>F5835</b> 35K 85CRI T5 Lamps Installed <b>EL</b> Emergency Battery Pack <b>GLR</b> Fast Blow Fuse <b>MS9</b> Master/Satellite w/9' Harness <b>PAF</b> Paint After Fabrication For more options see pages 99-114.					
24 2' x 4'	17 2', T8: 17 Watt 24 2', T5HO: 24 Watt 28 4', T5: 28 Watt 31U1 U-Bent, 1 1/8" Leg Spacing T8: 31 Watt 32 4', T8: 32, 30, 28 or 25 Watt 32U6 U-Bent, 6" Leg Spacing T8: 32 Watt 40TT Twin Tube Compact, 2G11 Base: 40 Watt 54 4', T5HO: 54 or 51 Watt	<b>A19</b> Pattern 19 Acrylic Lens, 0.156" Nominal <b>PC1</b> 1/2" x 1/2" x 1/2" Specular Silver Polystyrene Louver <b>PC2</b> 1 1/2" x 1 1/2" x 1" Specular Silver Polystyrene Louver For more shielding options see page 41.							

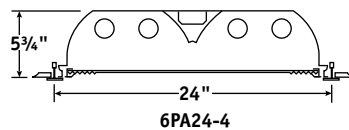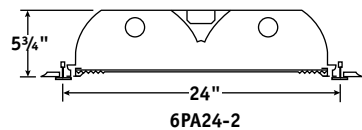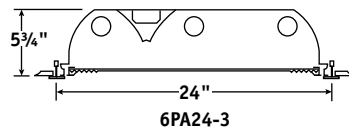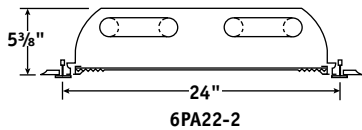

### PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS	LAMP TYPE	GRID TRIM HEIGHT
2' x 2'	2	14, 17, 24, 31U1, 32U6, 40TT	5 3/8"
	3	14, 17, 24, 31U1, 40TT	5 3/8"
	4	14, 17, 24	5 3/8"
2' x 4'	2	28, 32, 54	5 3/4"
	3	28, 32, 54	5 3/4"
	4	28, 32, 54	5 3/4"
	6	28, 32, 54	5 3/4"