



FEATURES

- Enhanced optics deliver 89% efficiency (2' x 4')
- Typically qualifies for EPAct tax deduction (2' x 4')
- Nominal 3" deep louver provides excellent glare control for today's architectural interiors with maintenance-free operation
- Shallow housing allows installation in restricted ceiling plenums
- Optimized for standard T8 lamp technology, tuned ballast reduces power usage to 67 watts (2' x 4')
- Full black reveal provides floating door appearance and full air handling capabilities
- EnergyMax® Plus parabolic uses 28W T8 lamps to reduce power usage to 56 watts
- Custom MIRO® formulation louver developed by Alanod for Columbia Lighting
- UL listed 1598, cUL or CSA. Damp Location standard


ORDERING INFORMATION

EMX	2	G	M5					
MODEL	NO. OF LAMPS	CEILING TYPE	CELLS WIDE BY CELLS LONG	VOLTAGE	OPTIONS			
EMX EnergyMax® Energy Saving Parabolic	2 Two	G Grid For hard ceilings use flange kit.	See Product Availability table below.	U 120V-277V 347 347V	PLUS30	30K 82CRI 28W T8 Lamps Installed ¹		
					PLUS35	35K 82CRI 28W T8 Lamps Installed ¹		
					PLUS41	41K 82CRI 28W T8 Lamps Installed ¹		
					F0830	30K 82CRI T8 Lamps Installed		
					F0835	35K 82CRI T8 Lamps Installed		
					F0841	41K 82CRI T8 Lamps Installed		
					F5835	35K 85CRI T5 Lamps Installed		
					C388	3-Wire Flex		
					C488	4-Wire Flex		
					EL	Emergency Battery Pack		
					GLR	Fast Blow Fuse		
					GMF	Slow Blow Fuse		
					TB4	Four Bulk T-Bar Clips		
					NYC	NYC Compliant		
					NYCU	NYC Compliant, Union Label		
SIZE	LAMP TYPE	LOUVER FINISH	AIR HANDLING	BALLAST				
22 2' x 2'	14 2', T5: 14 Watt	M5 MIRO-5	S Static	E Electronic T8, 0.88 Ballast Factor, Instant Start				
24 2' x 4'	17 2', T8: 17 Watt		A Air Handling	ESD Electronic T8, 0.88 Ballast Factor, Step Dimming, Programmed Start				
	24 2', T5HO: 24 Watt		AV Air Handling w/Supply Vanes	ELW Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start				
	28 4', T5: 28 Watt		C Combination Supply/Extract	EHL Electronic T8, 1.18 Ballast Factor, High Wattage, Instant Start				
	32 4', T8: 32, 30, 28 or 25 Watt		CV Combination Supply Vanes/Extract	NEMA E104 Electronic T8, 1.04 Ballast Factor, Instant Start				
	32U6 U-Bent, 6" Leg Spacing T8: 32 Watt		CD Combination Supply Extract Dampers	NEMA ESD104 Electronic T8, 1.04 Ballast Factor, Step Dimming, Programmed Start				
	54 4', T5HO: 54 or 51 Watt		CVD Combination Supply Vanes Extract Dampers	EP Electronic T5, T5HO, or T8, Programmed Start				
			H Heat Extract	EP95 Electronic T5, 0.95 Ballast Factor, Programmed Start				
			HD Heat Extract w/Dampers	EP115 Electronic T5, 1.15 Ballast Factor, Programmed Start				
				ESD95 Electronic T5, 0.95 Ballast Factor, Step Dimming, Programmed Start				
				ESD115 Electronic T5, 1.15 Ballast Factor, Step Dimming, Programmed Start				

ACCESSORIES (ORDER SEPARATELY)

- FK24** 2' x 4' Flange Kit
- FK22** 2' x 2' Flange Kit
- FKCR** Flange Kit Row Adaptor

¹Not recommended for use with step or full dimming.

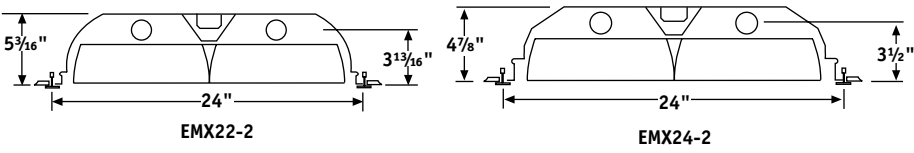

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS	LAMP TYPE	LOUVER CONFIGURATIONS
2' x 2'	2	14, 17, 24, 32U6	2 x 3 (6), 3 x 3 (9)
2' x 4'	2	28, 32, 54	2 x 6 (12)