

Enclosed and Gasketed Linear High Bay





FEATURES

- Extremely efficient fluorescent luminaire replaces HID in retail and industrial applications
- Highly specular contoured reflectors drive light down to provide excellent vertical footcandles
- Battery pack option (EL) provides instant-on emergency illumination (not available for wet location)
- Fully sealed housing for use in Class I Cleanroom applications
- Anodized extruded aluminum door frame
- One-piece, 18 gauge stainless or cold-rolled steel doors available
- Mounting bracket pre-installed for surface or cable mounting
- UL listed 1598, cUL or CSA. Damp Location standard, Wet Location option

ORDERING INFORMATION

LHC																					
MODEL	NO. OF LAMPS	DOOR STYLE		REFLECTOR		VOLTAGE		OPTIONS													
LHC Enclosed and Gasketed Linear High Bay	4 Four 6 Six See Product Availability table below.	FA White Flush Aluminum	FCS Flush One-Piece Steel Door	FSS Flush One-Piece Stainless Steel Door	M4R 95% Reflective Specular Aluminum (S/MH = 1.0)	LS Specular Anodized Aluminum (S/MH = 1.0)	GW Gloss White Powder Coat (S/MH - 1.4)	U 120V-277V	347 347V (HO only)	480 480V (HO only)	F0730 30K 75CRI T8 Lamps Installed	F0735 35K 75CRI T8 Lamps Installed	F0741 41K 75CRI T8 Lamps Installed	F0830 30K 82CRI T8 Lamps Installed	F5835 35K 85CRI T5 or T5HO Lamps Installed	F5841 41K 85CRI T5 or T5HO Lamps Installed	F5850 50K 82CRI T5HO Lamps Installed	EL Emergency Battery Pack (Not available for wet locations)	GLR Fast Blow Fuse	WG Wire Guard - (FA Door Frame Required)*	WL Wet Location
SIZE	LAMP TYPE	SHIELDING		BALLAST																	
164 16" x 4'	28 4', T5: 28 Watt	CA Clear Acrylic	CP Clear Polycarbonate	NOTE: See Technical Section for other ballast options.																	
24 2' x 4'	32 4', T8: 32, 30, 28 or 25 Watt	A12 Pattern 12 Acrylic Lens	A15 Pattern 15 Acrylic Lens, 0.200" Nominal	A19 Pattern 19 Acrylic Lens, 0.156" Nominal	E Electronic T8, Instant Start	4E 4-Lamp Electronic T8, Instant Start	EHL Electronic T8, High Light Output, Instant Start	EP Electronic T5 or T8, Programmed Start	4EP 4-Lamp Electronic T5HO (N/A 347V) or T8, Programmed Start	24EP (1) 2-Lamp and (1) 4-Lamp Electronic T5HO (N/A 347V or 480V) or T8, Programmed Start											
ACCESSORIES (ORDER SEPARATELY)																					
LHHB Universal Hanger Bracket Kit (Required for GLH cable kit)																					
GLH5 5' Adjustable Cable Kit*																					
GLH10 10' Adjustable Cable Kit*																					
GLH15 15' Adjustable Cable Kit*																					
*Use with LHHB. For more accessories see Technical Section.																					

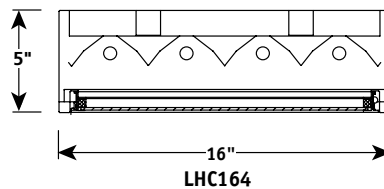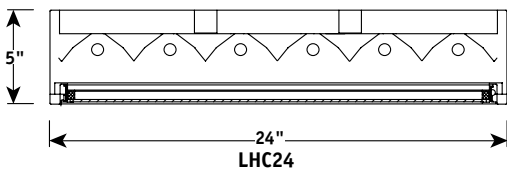

PRODUCT AVAILABILITY

MODEL	NO. OF LAMPS IN FIXTURE	LAMP TYPE	WIDTH	LENGTH	HEIGHT
LHC164	4	28, 32, 54	16"	48"	5"
LHC24	6	28, 32, 54	24"	48"	5"