

Enclosed and Gasketed Linear High Bay





FEATURES

- Extremely efficient fluorescent luminaire replaces HID in retail and industrial applications
- Highly specular contoured reflectors drive light down to provide excellent vertical footcandles
- Battery pack option (EL) provides instant-on emergency illumination (not available for wet location)
- Fully sealed housing for use in Class I Cleanroom applications
- Anodized extruded aluminum door frame
- One-piece, 18 gauge stainless or cold-rolled steel doors available
- Mounting bracket pre-installed for surface or cable mounting
- UL listed 1598, cUL or CSA. Damp Location standard, Wet Location option

ORDERING INFORMATION

LHC									
MODEL	NO. OF LAMPS	DOOR STYLE	REFLECTOR	VOLTAGE					
LHC Enclosed and Gasketed Linear High Bay	4 Four 6 Six See Product Availability table below.	FA White Flush Aluminum FCS Flush One-Piece Steel Door FSS Flush One-Piece Stainless Steel Door	M4R 95% Reflective Specular Aluminum (S/MH = 1.0) LS Specular Anodized Aluminum (S/MH = 1.0) GW Gloss White Powder Coat (S/MH - 1.4)	U 120V-277V 347 347V 480 480V					
SIZE	LAMP TYPE	SHIELDING	BALLAST	OPTIONS					
164 16" x 4'	28 4', T5: 28 Watt	CA Clear Acrylic CP Clear Polycarbonate A12 Pattern 12 Acrylic Lens A12125 Pattern 12 Acrylic Lens 0.0125" Nominal A15 Pattern 15 Acrylic Lens, 0.200" Nominal A19 Pattern 19 Acrylic Lens, 0.156" Nominal	NOTE: See Technical Section for other ballast options. E Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start EHL Electronic T8, High Light Output, Instant Start EP Electronic T5 or T8, Programmed Start 4EP 4-Lamp Electronic T5HO or T8, Programmed Start 24EP (1) 2-Lamp and (1) 4-Lamp Electronic T5HO or T8, Programmed Start	F0730 30K 75CRI T8 Lamps Installed F0735 35K 75CRI T8 Lamps Installed F0741 41K 75CRI T8 Lamps Installed F0830 30K 82CRI T8 Lamps Installed F5835 35K 85CRI T5 or T5HO Lamps Installed F5841 41K 85CRI T5 or T5HO Lamps Installed F5850 50K 82CRI T5HO Lamps Installed EL Emergency Battery Pack (Not available for wet locations) GLR Fast Blow Fuse WG Wire Guard - (FA Door Frame Required)* WL Wet Location					
24 2' x 4'	32 4', T8: 32, 30, 28 or 25 Watt 54 4', T5HO: 54 or 51 Watt			*Not available with FCS or FSS door.					
ACCESSORIES (ORDER SEPARATELY)									
LHHB Universal Hanger Bracket Kit (Required for GLH cable kit)									
GLH5 5' Adjustable Cable Kit*									
GLH10 10' Adjustable Cable Kit*									
GLH15 15' Adjustable Cable Kit*									
*Use with LHHB. For more accessories see Technical Section.									

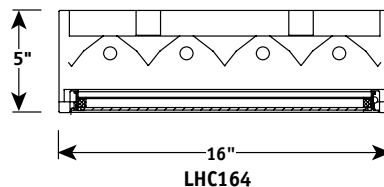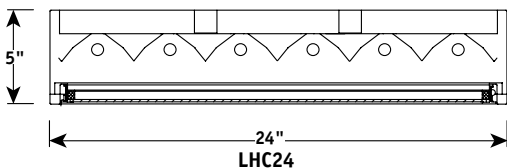

PRODUCT AVAILABILITY

MODEL	NO. OF LAMPS IN FIXTURE	LAMP TYPE	WIDTH	LENGTH	HEIGHT
LHC164	4	28, 32, 54	16"	48"	5"
LHC24	6	28, 32, 54	24"	48"	5"