

P4 SMALL CELL

Recessed Air Handling Small Cell Parabolic

PARABOLICS





FEATURES

- 1½" deep small cell louver reduces glare
- Proper lamp position ensures uniform illumination
- Black reveal with full air handling capabilities
- Anodized low iridescent aluminum louver
- Treated with a five stage phosphate bonding process and finished with a baked white enamel
- Mechanical light trap prevents light leaks
- Surface mount available
- UL listed 1598, cUL or CSA. Damp Location standard

ORDERING INFORMATION

P4									
MODEL	NO. OF LAMPS	CEILING TYPE	CELLS WIDE BY CELLS LONG	AIR CONTROL	VOLTAGE	OPTIONS			
P4 Recessed Air Handling Small Cell Parabolic	2 Two 3 Three 4 Four See Product Availability table below.	G Grid F Overlap Flange M Modular Fit-in Trim SG Slot Grid SM Surface Mount (Static only)	See Product Availability table below.	Blank None V Supply Vanes D Extract Dampers VD Vanes & Dampers For information about air handling and controls see page 103.	U 120V-277V 347 347V	F0735 35K 75CRI T8 Lamps Installed F0741 41K 75CRI T8 Lamp Installed F0835 35K 82CRI T8 Lamps Installed F0841 41K 82CRI T8 Lamps Installed F5835 35K 85CRI T5 Lamps Installed C388 3-Wire Flex C488 4-Wire Flex EL Emergency Battery Pack GLR Fast Blow Fuse GMF Slow Blow Fuse MS9 Master/Satellite w/9' Harness PAF Paint After Fabrication NYC NYC Compliant NYCU NYC Compliant, Union Label			
SIZE	LAMP TYPE	LOUVER FINISH	AIR FUNCTIONS	BALLAST	NOTE: See Technical Section for other ballast options.				
14 1' × 4' 22 2' × 2' 24 2' × 4'	17 2', T8: 17 Watt 28 4', T5: 28 Watt 31U1 U-Bent, 1½" Leg Spacing T8: 31 Watt 32 4', T8: 32, 30, 28 or 25 Watt 32U6 U-Bent, 6" Leg Spacing T8: 32 Watt 40TT Twin Tube Compact, 2G11 Base: 40 Watt 54 4', T5HO: 54 or 51 Watt	LD Low Iridescent Semi-Specular LS Low Iridescent Specular MA Matte Anodized Low Iridescent Semi-Specular Aluminum	S Static A Air Handling C Combination Supply/Extract H Heat Extract	E Electronic T8, Instant Start 3E 3-Lamp Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start EP Electronic T5 or T8, Programmed Start 3EP 3-Lamp Electronic T5HO or T8, Programmed Start 4EP 4-Lamp Electronic T5HO (N/A 347V) or T8, Programmed Start ETT Electronic Twin Tube, Instant Start (Specify voltage) ELW Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start 3ELW 3-lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start	For other options see pages 96-112.				

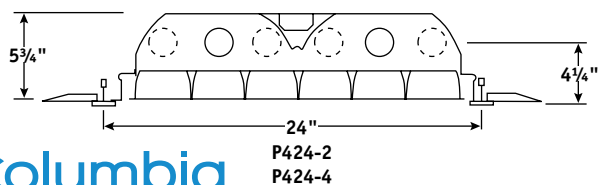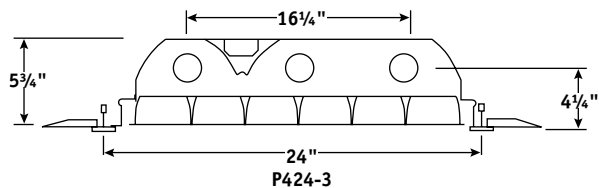

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS	LAMP TYPE	LOUVER CONFIGURATIONS
2' × 2'	2	17, 31U1, 32U6, 40TT	6 × 6 (36), 7 × 7 (49)
	3	17, 31U1, 40TT	6 × 6 (36), 7 × 7 (49)
2' × 4'	2	28, 32, 54	6 × 13 (78), 7 × 15 (105)
	3	28, 32, 54	6 × 13 (78), 7 × 15 (105)
	4	28, 32, 54	6 × 13 (78), 7 × 15 (105)

For other lamp or louver configurations, contact your local Columbia Lighting representative. Various options may increase fixture height on 2' × 2' units. Contact your Columbia Lighting representative if plenum depth is a concern.