

# P4 SMALL CELL

## Recessed Air Handling Small Cell Parabolic

PARABOLICS

### FEATURES

- 1½" deep small cell louver reduces glare
- Proper lamp position ensures uniform illumination
- Black reveal with full air handling capabilities
- Anodized low iridescent aluminum louver
- Treated with a five stage phosphate bonding process and finished with a baked white enamel
- Mechanical light trap prevents light leaks
- Surface mount available
- UL listed 1598, cUL or CSA. Damp Location standard



### ORDERING INFORMATION



<b>P4</b>									
<b>MODEL</b>	<b>NO. OF LAMPS</b>	<b>CEILING TYPE</b>	<b>CELLS WIDE BY CELLS LONG</b>	<b>AIR CONTROL</b>	<b>VOLTAGE</b>				
<b>P4</b> Recessed Air Handling Small Cell Parabolic	<b>2</b> Two <b>3</b> Three <b>4</b> Four See Product Availability table below.	<b>G</b> Grid <b>F</b> Overlap Flange <b>M</b> Modular Fit-in Trim <b>SG</b> Slot Grid <b>SM</b> Surface Mount (Static only)	See Product Availability table below.	<b>Blank</b> None <b>V</b> Supply Vanes <b>D</b> Extract Dampers <b>VD</b> Vanes & Dampers For information about air handling and controls see page 103.	<b>U</b> 120V-277V <b>347</b> 347V				
<b>SIZE</b>	<b>LAMP TYPE</b>	<b>LOUVER FINISH</b>	<b>AIR FUNCTIONS</b>	<b>BALLAST</b>	<b>OPTIONS</b>				
<b>22</b> 2' x 2'	<b>17</b> 2', T8: 17 Watt	<b>LD</b> Low Iridescent Semi-Specular	<b>S</b> Static	<b>NOTE:</b> See Technical Section for other ballast options.	<b>F0735</b> 35K 75CRI T8 Lamps Installed				
<b>24</b> 2' x 4'	<b>28</b> 4', T5: 28 Watt	<b>LS</b> Low Iridescent Specular	<b>A</b> Air Handling	<b>E</b> Electronic T8, Instant Start	<b>F0835</b> 35K 82CRI T8 Lamps Installed				
	<b>31U1</b> U-Bent, 1½" Leg Spacing T8: 31 Watt	<b>MA</b> Matte Anodized Low Iridescent Semi-Specular Aluminum	<b>C</b> Combination Supply/Extract	<b>3E</b> 3-Lamp Electronic T8, Instant Start	<b>F5835</b> 35K 85CRI T5 Lamps Installed				
	<b>32</b> 4', T8: 32, 30, 28 or 25 Watt		<b>H</b> Heat Extract	<b>4E</b> 4-Lamp Electronic T8, Instant Start	<b>C388</b> 3-Wire Flex				
	<b>32U6</b> U-Bent, 6" Leg Spacing T8: 32 Watt			<b>EP</b> Electronic T5 or T8, Programmed Start	<b>C488</b> 4-Wire Flex				
	<b>40TT</b> Twin Tube Compact, 2G11 Base: 40 Watt			<b>3EP</b> 3-Lamp Electronic T5H0 or T8, Programmed Start	<b>EL</b> Emergency Battery Pack				
	<b>54</b> 4', T5H0: 54 or 51 Watt			<b>4EP</b> 4-Lamp Electronic T5H0 (N/A 347V) or T8, Programmed Start	<b>GLR</b> Fast Blow Fuse				
				<b>ETT</b> Electronic Twin Tube, Instant Start (Specify voltage)	<b>GMF</b> Slow Blow Fuse				
					<b>MS9</b> Master/Satellite w/9' Harness				
					<b>PAF</b> Paint After Fabrication				
					<b>NYC</b> NYC Compliant				
					<b>NYCU</b> NYC Compliant, Union Label				

For other options see pages 99-114.

### PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS	LAMP TYPE	LOUVER CONFIGURATIONS
2' x 2'	2	17, 31U1, 32U6, 40TT	6 x 6 (36), 7 x 7 (49)
	3	17, 31U1, 40TT	6 x 6 (36), 7 x 7 (49)
2' x 4'	2	28, 32, 54	6 x 13 (78), 7 x 15 (105)
	3	28, 32, 54	6 x 13 (78), 7 x 15 (105)
	4	28, 32, 54	6 x 13 (78), 7 x 15 (105)

For other lamp or louver configurations, contact your local Columbia Lighting representative. Various options may increase fixture height on 2' x 2' units. Contact your Columbia Lighting representative if plenum depth is a concern.

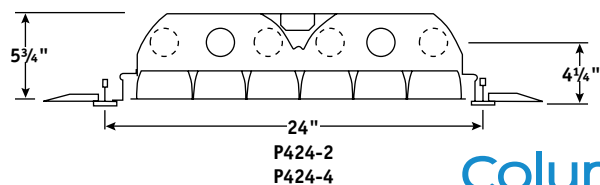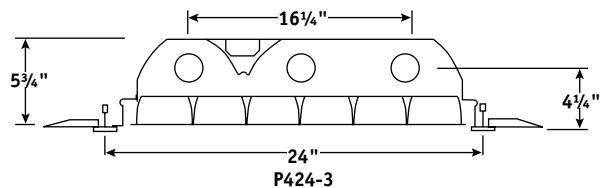

**Columbia**  
LIGHTING