

Parawash Recessed Wall Wash





FEATURES

- Wall washing makes an environment appear larger and brighter
- Wide light distribution provides uniform illumination at up to 8' spacings
- Models with unique kicker reflector directs majority of light on wall up to the ceiling line
- Used at ends and sides of parabolic rows
- Choice of linear kicker reflector or cross baffle
- Anodized low iridescent aluminum reflector
- Ideal for office, retail, or video conferencing
- White powder coat finish painted after fabrication
- UL listed 1598, cUL or CSA. Damp Location standard

ORDERING INFORMATION

PW	1		LD			
MODEL PW Parawash Recessed Wall Wash	NO. OF LAMPS 1 One See Product Availability table below.	CEILING TYPE G Grid SG Slot Grid SM Surface Mount	APERTURE K Kicker B Cross Baffle	VOLTAGE U 120V-277V 347 347V	OPTIONS EL Emergency Battery Pack GLR Fast Blow Fuse GMF Slow Blow Fuse LENS Spread Lens (Twin Tube Kicker unit only) NYC NYC Compliant NYCU NYC Compliant, Union Label	
SIZE	LAMP TYPE	REFLECTOR FINISH	BALLAST			ACCESSORIES (ORDER SEPARATELY) FK81 8" x 1' Flange Kit FK82 8" x 2' Flange Kit FK84 8" x 4' Flange Kit
81 8" x 1'	17 2', T8: 17 Watt	LD Low Iridescent Semi-Specular (Std.)	NOTE: See Technical Section for other ballast options.			
82 8" x 2'	28 4', T5: 28 Watt		E Electronic T8, Instant Start			
84 8" x 4'	32 4', T8: 32, 30, 28 or 25 Watt		EP Electronic T5 or T8, Programmed Start			
	40TT Twin Tube Compact, 2G11 Base: 40 Watt		ETT Electronic Twin Tube, Instant Start (Specify voltage)			
	54 4', T5HO: 54 or 51 Watt					

For other options see pages 99-114.

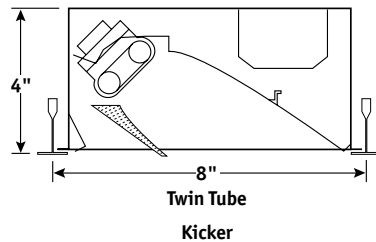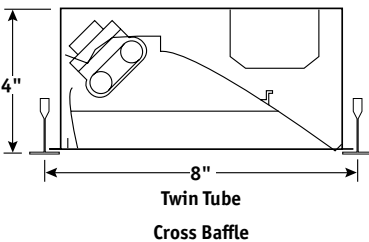

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN UNIT	LAMP TYPE	CROSS BAFFLE CONFIGURATIONS
8" x 2'	1	1	17, 40TT	1 x 9 (9)
8" x 4'	1	1	28, 32, 54	1 x 18 (18)
	1	2	40TT	1 x 18 (18)

If desired lamp or cross baffle configuration is not shown above, contact your local Columbia Lighting representative.