



FEATURES


- Contemporary aesthetics create visual interest
- Low profile nominal 1' × 4'
- Choice of perforated baskets or baffles inset in perforated baskets provide radiant illumination in a choice of aesthetic options
- Indirect components reflect light for a soft and even illumination on vertical and horizontal surfaces
- Direct lighting component enhances facial delineation
- Surface mounting standard. Cable mounting available
- 4' and 8' lengths facilitate single or in-row mounting
- Full product family includes Stratus fully recessed units for applications where a complementary appearance is desired
- UL listed 1598, cUL or CSA, Damp Location Listed

ORDERING INFORMATION

STP	-	2	-		-		-		-		-	
MODEL STP Stratus® Surface or Pendant Mounted	NO. OF LAMPS IN CROSS SECTION 2 Two See Product Availability table below.		SHIELDING MPO Metal Perf w/Overlay WCBMPO White Cross Baffle inset in perforated metal WPBMPO White Perforated Cross Baffle inset in perforated metal		REFLECTOR TYPE ST Solid Type Reflector (Std.) U Apertured Uplight Reflector		VOLTAGE U 120V-277V 347 347V		OPTIONS EL Emergency Battery Pack (Small case size) GLR Fast Blow Fuse GMF Slow Blow Fuse NYC NYC Compliant NYCU NYC Compliant, Union Label			
SIZE 14 1' × 4' 18 1' × 8'		LAMP TYPE 28 4', T5: 28 Watt 32 4', T8: 32, 30, 28 or 25 Watt 54 4', T5H0: 54 or 51 Watt		BALLAST NOTE: See Technical Section for other ballast options. E Electronic T8, Instant Start 3E 3-Lamp Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start EP Electronic T8, Programmed Start				For more options see pages 96-112.				

ACCESSORIES (ORDER SEPARATELY)	
CM24	24" Adjustable Cable Mounting Kit
CM48	48" Adjustable Cable Mounting Kit

Cable mounting kits are ordered and shipped separately from fixture. Other lengths are available on request.

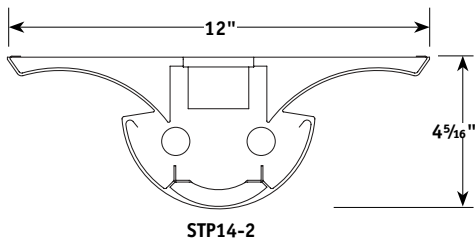

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN FIXTURE	LAMP TYPE	WIDTH	LENGTH	HEIGHT
1' × 4'	2	2	28, 32, 54	12"	48 ³ / ₁₆ "	4 ⁵ / ₁₆ "
1' × 8'	2	4	28, 32, 54	12"	96 ³ / ₁₆ "	4 ⁵ / ₁₆ "