

Stratus Surface or Pendant Mounted

FEATURES

- Contemporary aesthetics create visual interest
- Low profile nominal 1' x 4'
- Choice of perforated baskets or baffles inset in perforated baskets provide radiant illumination in a choice of aesthetic options
- Indirect components reflect light for a soft and even illumination on vertical and horizontal surfaces
- Direct lighting component enhances facial delineation
- Surface mounting standard. Cable mounting available
- 4' and 8' lengths facilitate single or in-row mounting
- Full product family includes Stratus fully recessed units for applications where a complementary appearance is desired



ORDERING INFORMATION

STP	2						
MODEL STP Stratus Surface or Pendant Mounted	NO. OF LAMPS IN CROSS SECTION 2 Two See Product Availability table below.	SHIELDING MPO Metal Perf w/Overlay MPOWCB White Cross Baffle inset in perforated metal MPOWPB White Perforated Cross Baffle inset in perforated metal	VOLTAGE U 120V-277V 347 347V	OPTIONS EL Emergency Battery Pack (Small case size) GLR Fast Blow Fuse GMF Slow Blow Fuse NYC NYC Compliant NYCU NYC Compliant, Union Label	SIZE 14 1' x 4' 18 1' x 8'	LAMP TYPE 28 4', T5: 28 Watt 32 4', T8: 32, 30, 28 or 25 Watt 54 4', T5HO: 54 or 51 Watt	BALLAST NOTE: See Technical Section for other ballast options. E Electronic T8, Instant Start 3E 3-Lamp Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start EP Electronic T8, Programmed Start

For more options see pages 99-114.


ACCESSORIES (ORDER SEPARATELY)

- CM24** 24" Adjustable Cable Mounting Kit
- CM48** 48" Adjustable Cable Mounting Kit

Cable mounting kits are ordered and shipped separately from fixture. Other lengths are available on request.

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN FIXTURE	LAMP TYPE	WIDTH	LENGTH	HEIGHT
1' x 4'	2	2	28, 32, 54	12"	48 ³ / ₁₆ "	4 ⁵ / ₁₆ "
1' x 8'	2	4	28, 32, 54	12"	96 ³ / ₁₆ "	4 ⁵ / ₁₆ "

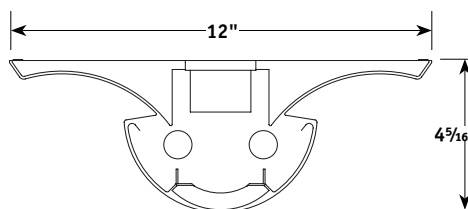

STP14-2