

STRL

Stratus Center Louver Recessed Indirect

RECESSED ARCHITECTURAL



FEATURES




- True parabolic center louver provides precise optical control
- High efficiency; delivers more light to the task
- One, two or three lamp cross sections
- Available for T8, T5, T5HO, 40TT or 50TT lamps
- Thermoplastic basket support brackets
- Light basket and reflector are powder coated after fabrication
- Louver available in a variety of finishes
- Easy to install and maintain
- UL listed 1598, cUL or CSA. Damp Location standard

ORDERING INFORMATION

STRL					MPO					
MODEL	NO. OF LAMPS	CEILING TYPE	SHIELDING	AIR FUNCTION	VOLTAGE	SIZE	LAMP TYPE	LOUVER TYPE	BALLAST	OPTIONS
STRL Stratus Center Louver Recessed Indirect	1 One 2 Two 3 Three <small>See Product Availability table below.</small>	G Grid Lay-in SG Slot Grid SM Surface Mount	MPO Metal Perf w/Overlay	Blank Static A Air Handling	U 120V-277V 347 347V	14 1' x 4' 22 2' x 2' 24 2' x 4'	14 2', T5: 14 Watt 17 2', T8: 17 Watt 24 2', T5HO: 24 Watt 28 4', T5: 28 Watt 32 4', T8: 32, 30, 28 or 25 Watt 40TT Twin Tube Compact, 2G11 Base: 40 Watt 54 4', T5HO: 54 or 51 Watt	High Efficiency (H) HLS Low Iridescent Specular Parabolic HMA Matte Anodized Low Iridescent Semi-Specular White Steel Cross Baffle WCB White Cross Baffle WPB White Perforated Cross Baffle	NOTE: See Technical Section for other ballast options. E Electronic T8, Instant Start 3E 3-Lamp Electronic T8, Instant Start ED Electronic Dimming T8 and T5 EP Electronic T5, T5HO, or T8, Programmed Start* ETT Electronic Twin Tube, Instant Start	EL Emergency Battery Pack GLR Fast Blow Fuse GMF Slow Blow Fuse NYC NYC Compliant NYCU NYC Compliant, Union Label

ACCESSORIES (ORDER SEPARATELY)

- FK14** 1' x 4' Flange Kit
- FK22** 2' x 2' Flange Kit
- FK24** 2' x 4' Flange Kit

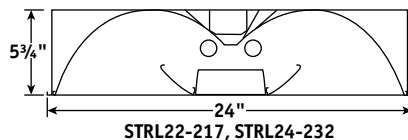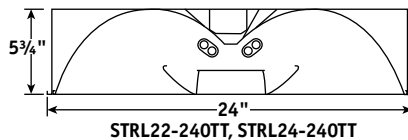

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN FIXTURE	LAMP TYPE	HEIGHT
1' x 4'	1	1	28, 32, 54	5 3/4"
	1	2	40TT	5 3/4"
	2	2	28, 32, 54	5 3/4"
2' x 2'	2	2	14, 17, 24, 40TT	5 3/4"
	3	3	14, 17, 24	5 3/4"
2' x 4'	2	2	28, 32, 54	5 3/4"
	2	4	40TT	5 3/4"
	3	3	28, 32, 54	5 3/4"

Note: 3-lamp, T8 units not available for end-to-end row mounting.