

Stratus® Recessed Indirect Side Basket



FEATURES


- Softly glowing side baskets create an elegant aesthetic statement
- Available for T8, Twin Tube, Linear T5, or T5HO lamps
- Baskets and reflector are powder coated after fabrication
- 1' x 4', 2' x 2', and 2' x 4'
- Surface mount available
- Simple to install, easy to maintain
- UL listed 1598, cUL or CSA. Damp Location standard

ORDERING INFORMATION

STS	-		-		-	MPO	-		-		-		-	
MODEL STS Stratus® Recessed Indirect Side Basket	NO. OF LAMPS IN CROSS SECTION 1 One 2 Two 4 Four See Product Availability table below.		CEILING TYPE G Grid Lay-in SG Slot Grid SM Surface Mount	AIR FUNCTION Blank Static A Air Handling	VOLTAGE U 120V-277V 347 347V									
SIZE 14 1' x 4' 22 2' x 2' 24 2' x 4'	LAMP TYPE 14 2', T5: 14 Watt 17 2', T8: 17 Watt 24 2', T5HO: 24 Watt 28 4', T5: 28 Watt 32 4', T8: 32, 30, 28 or 25 Watt 40TT Twin Tube Compact, 2G11 Base: 40 Watt 54 4', T5HO: 54 or 51 Watt		SHIELDING MPO Metal Perf w/Overlay	BALLAST NOTE: See Technical Section for other ballast options. E Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start ED Electronic Dimming T8 and T5 EP Electronic T5, T5HO, or T8, Programmed Start ETT Electronic Twin Tube, Instant Start	OPTIONS EL Emergency Battery Pack GLR Fast Blow Fuse GMF Slow Blow Fuse NYC NYC Compliant NYCU NYC Compliant, Union Label									

ACCESSORIES (ORDER SEPARATELY)

- FK14** 1' x 4' Flange Kit
- FK22** 2' x 2' Flange Kit
- FK24** 2' x 4' Flange Kit
- FKCR** Flange Kit Continuous Row Connector

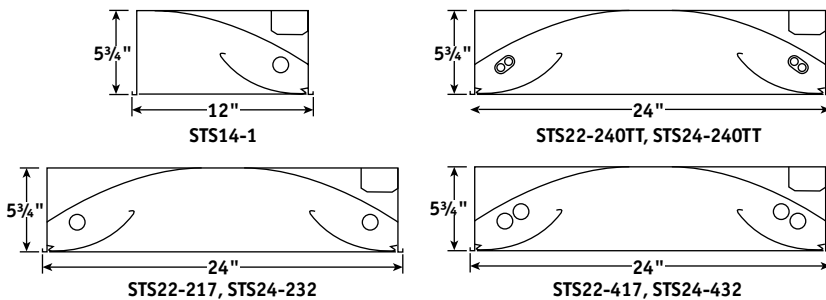

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN FIXTURE	LAMP TYPE	HEIGHT
1' x 4'	1	1	28, 32, 54	5 3/4"
	1	2	40TT	5 3/4"
	2	2	28, 32, 54	5 3/4"
2' x 2'	2	2	14, 17, 24	5 3/4"
	2	2	40TT	5 3/4"
	4	4	14, 17, 24	5 3/4"
2' x 4'	2	2	28, 32, 54	5 3/4"
	2	4	40TT	5 3/4"
	4	4	28, 32, 54	5 3/4"