

TRA

Transition® High Efficiency Architectural Lensed

RECESSED ARCHITECTURAL



FEATURES

- Precision optical design produces high efficiency in a high visual comfort, architecturally styled lensed fixture
- Balanced reflector and lens curves provide architectural interest with low brightness and low contrast
- Optimized coating process and unique paint formulation provide exceptional reflectivity in a matte finish for a soft visual image
- Completely recessed, provides a clean ceiling with uniform illumination at mounting heights as low as 8 feet
- Available for use with T8, T5, or T5HO linear fluorescent and twin tube lamps
- Optional acrylic dust guard pivots to protect lamp compartment against contaminants especially for schools, medical facilities and public spaces
- UL listed 1598, cUL or CSA, Damp Location Listed
- Available with exclusive wiHUBB technology preinstalled
 - Peer to peer, self-healing wireless mesh network
 - Integrated control system for 0-10VDC or step dimming, or On/Off



ORDERING INFORMATION

TRA					CLO			
MODEL	NO. OF LAMPS IN CROSS SECTION	CEILING TYPE	BALLAST	OPTIONS				
TRA Transition® High Efficiency Architectural Lensed	1 One 2 Two 3 Three	G Grid Lay-in SM Surface Mount	E Electronic T8, Instant Start ED Electronic Dimming T8 and T5 EP Electronic T5, T5HO, or T8, Programmed Start ETT Electronic Twin Tube, Instant Start EPTT Electronic Twin Tube, Programmed Start 3E 3-Lamp Electronic T8, Instant Start 3EP 3-Lamp Electronic T8, Programmed Start ELW 2-Lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start 3ELW 3-Lamp Electronic T8, 0.77 Ballast Factor, Low Wattage, Instant Start E104 Electronic T8, 1.04 Ballast Factor, Instant Start ESD104 Electronic T8, 1.04 Ballast Factor, Step Dimming, Programmed Start ¹	EL Emergency Battery Pack, T8 EL5 Emergency Battery Pack, T5 F0730 30K 75CRI T8 Lamps Installed F0735 35K 75CRI T8 Lamps Installed F0741 41K 75CRI T8 Lamps Installed F0830 30K 82CRI T8 Lamps Installed F0835 35K 82CRI T8 Lamps Installed F0841 41K 82CRI T8 Lamps Installed F5830 30K 85CRI T5 or T5HO Lamps Installed F5835 35K 85CRI T5 or T5HO Lamps Installed F5841 41K 85CRI T5 or T5HO Lamps Installed PLUS30 30K 82CRI 28W T8 Lamps Installed ² PLUS35 35K 82CRI 28W T8 Lamps Installed ² PLUS41 41K 82CRI 28W T8 Lamps Installed ² FTT830 30K 82CRI 40W TT Lamps Installed FTT835 35K 82CRI 40W TT Lamps Installed FTT841 41K 82CRI 40W TT Lamps Installed C388 3-Wire Flex C488 4-Wire Flex DG Dust Guard NYC NYC Compliant NYCU NYC Compliant, Union Label WIH wiHUBB Enabled ³				
SIZE	LAMP TYPE	SHIELDING	VOLTAGE					
14 1' x 4' 22 2' x 2' 24 2' x 4'	14 2' T5; 14 Watt 17 2', T8; 17 Watt 24 2', T5HO; 24 Watt 28 4', T5; 28 Watt 32 4', T8; 32, 30, 28 or 25 Watt 40TT 2', Twin Tube Compact, 2G11 Base; 40 Watt 54 4', T5HO, 54 Watt	CLO Clear Linear Prism Acrylic with Overlay	U 120V-277V 347 347V					
ACCESSORIES (ORDER SEPARATELY)								
FK14 1' x 4' Flange Kit FK22 2' x 2' Flange Kit FK24 2' x 4' Flange Kit								

¹Not compatible with T8 25, 28, or 30 watt energy savings lamps.

²Not recommended for use with step or full dimming.

³Not available with Surface Mount Ceiling Types

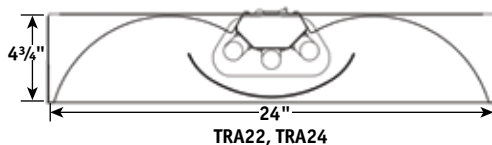

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN FIXTURE	LAMP TYPE	HEIGHT
1' x 4'	1	1	28, 32, 54	5 3/4"
	1	2	40TT	5 3/4"
	2	2	28, 32, 54	5 3/4"
	3	3	28, 32, 54	5 3/4"
2' x 2'	2	2	14, 17, 24, 40TT	4 3/8"
	3	3	14, 17, 24	4 3/8"
2' x 4'	2	2	28, 32, 54	4 3/8"
	2	4	40TT	4 3/8"
	3	3	28, 32, 54	4 3/8"
	3	6	40TT	4 3/8"