

Videoconference Luminaire




FEATURES

- Designed for videoconferencing, video arraigments, remote classroom applications, and conference rooms
- Directional lens/baffle system throws light onto vertical surfaces and clearly illuminates facial features for videoconferencing
- Ships separately
- Lamps orient to wash desired surface
- 1' x 4' size drops into standard T-Bar grid system
- Unique lens with elevating and depressing prisms controls glare at critical angles, shielding ships separately
- Recessed unit maintains clean ceiling line
- Uses T8 and T5 technology to integrate easily with dimming and control systems
- UL listed 1598, cUL or CSA. Damp Location standard

ORDERING INFORMATION

VC	2					
MODEL	NO. OF LAMPS	LENS	BALLAST	VOLTAGE	OPTIONS	
VC Videoconference Luminaire	2 Two See Product Availability table below.	VCL Black Cross Baffle With Unique CRT Overlay PVC Unique CRT Overlay	NOTE: See Technical Section for other ballast options. E Electronic T8, Instant Start ED Electronic Dimming T5 or T8 EP Electronic T5 or T8, Programmed Start	U 120V-277V 347 347V	C388 3-Wire Flex C488 4-Wire Flex GLR Fast Blow Fuse GMF Slow Blow Fuse NYC NYC Compliant NYCU NYC Compliant, Union Label	
LENGTH	LAMP TYPE	For other options see pages 96-112.				
12 1' x 2' 14 1' x 4'	17 2', T8: 17 Watt 28 4', T5: 28 Watt 32 4', T8: 32, 30, 28 or 25 Watt 54 4', T5HO: 54 or 51 Watt					

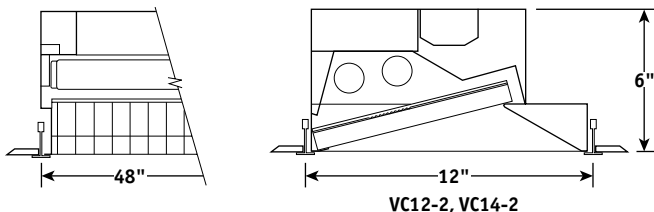

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN UNIT	LAMP TYPE	WIDTH	LENGTH	HEIGHT
1' x 2'	2	2	17	12"	24"	6"
1' x 4'	2	2	28, 32, 54	12"	48"	6"