

Also available with 2, 3, or 6 lamps

**FEATURES**

- 4½" deep troffer eliminates lens shadowing
- Contoured housing maximizes photometric performance with uniform lens brightness
- Mitered corners on door present a clean uninterrupted appearance
- Full black reveal presents a floating door appearance
- Full air handling capabilities available
- Mechanical light trap prevents light leaks
- Unique stepped ballast cover prevents any shadow being seen through the lens
- Heavy duty post-painted door frame enhances appearance
- Snug door fit eliminates light leaks

**PROJECT INFORMATION**

Project Name \_\_\_\_\_

Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Date \_\_\_\_\_

**HOUSING**

Fixture is constructed of die formed and embossed code gauge steel. End caps are hinged and riveted to the housing for added rigidity. Designed for installation in all ceilings as shown in Ceiling Compatibility on reverse side. Specify exact ceiling type. Integral T-bar clips are located in the end cap of the housing.

**BALLASTS**

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, sound rated A, unless otherwise specified. CEE NEMA Premium compliant.

**ELECTRICAL**

Standard class "P", thermally protected, auto-resetting HPF ballast, sound rated A. CEE NEMA Premium compliant. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

**FINISH**

All metal parts are processed with a multi-stage phosphate bonding treatment and finished with a high reflectance baked white enamel. Regressed air slots and control vanes are finished in flat black. For a post painted housing finish suffix catalog number with PAF.

**SHIELDING**

Standard lens is a 100% clear prismatic acrylic pattern 12. For other available lenses consult lens option sheet or contact your Columbia representative. Steel or aluminum door frames are retained by steel hinges and spring steel latches. Door hinges and latches from either side of fixture and can be easily removed without tools. Door frames feature snug fitting mitered corner joints and are available in flush or regress design. All door frames are painted after fabrication. Doors are surrounded by a uniform black reveal. A mechanical light trap prevents light leaks.

**AIR COMPATIBILITY**

All units may be used for heated or cooled air outlet or return air vent in ceiling. Also may be used for direct air return to plenum of non-combustible construction. Fixtures are compatible with air diffusers by all major air boot manufacturers. Air removal options must be specified.

**CERTIFICATION**

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.

**ORDERING INFORMATION**

**EXAMPLE 5PA24-432G-FAA12-S-EU-GLR**

5PA	24	-	4	-	-	-	-
MODEL	NO. OF LAMPS	CEILING TYPE	DOOR	AIR HANDLING	AIR CONTROL	VOLTAGE	OPTIONS
5PA 4½" Housing	4 Four	G Grid F Overlap Flange M Modular Fit-in Trim SG Slot Grid	FA Flush Aluminum RA Regressed Aluminum	S Static A Air Supply/Return H Heat Extract C Combination Supply/Extract	Blank None V Air Supply/Return Vanes D Heat Extract Dampers VD Supply/Return Vanes & Heat Extract Dampers	U 120V-277V 347 347V	F0735 35K 75 CRI T8 Lamps Installed F0835 35K 80 CRI T8 Lamps Installed F5835 35K 80 CRI T5 Lamps Installed GLR Fast Blow Fuse GMF Slow Blow Fuse EL Emergency Battery Pack MS9 Master/Satellite w/9' Harness PAF Paint After Fabrication NYC NYC Compliant NYCU NYC Compliant, Union Label
	SIZE	LAMP TYPE	SHIELDING		BALLAST		
	24 2' x 4'	28 4', T5: 28 Watt 32 4', T8: 32, 30, 28 or 25 Watt 54 4', T5HO: 54 or 51 Watt	A12 Acrylic Prismatic Pattern 12 A19 Acrylic Prismatic Pattern 19 PC1 ½" x ½" x ½" Specular Silver Polystyrene Louver PC2 1½" x 1½" x 1" Specular Silver Polystyrene Louver <small>For thicker lens, specify - i.e., A12.125.</small>		E Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start EP Electronic T5 or T8, Programmed Start 4EP 4-Lamp Electronic T5HO (N/A 347V) or T8, Programmed Start <small>For a specific ballast vendor, show as option.</small>		



### PHOTOMETRIC DATA

Test 11160 Test Date 1/8/03

#### LUMINAIRE DATA

Luminaire	5PA24-432G-FSA12-4E 5PA Lensed Troffer 2' x 4' 4-Lamp with A-12 Pattern Acrylic Prisms Lens
Ballast	B4321120RH
Ballast Factor	0.91
Lamp	FO32/741
Lumens per Lamp	2850
Total Input Watts	109
Shielding Angle	N/A
Spacing Criterion	0° = 1.22 90° = 1.26
Luminous Opening in Feet	Length: 3.67 Width: 1.71 Height: 0.00

#### ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	2658	23.3	34.0
0-40	4299	37.7	55.0
0-60	6772	59.4	86.6
0-90	7817	68.6	100.0
0-180	7817	68.6	100.0


#### ENERGY DATA

Total Luminaire Efficiency	68.6%
Luminaire Efficacy Rating (LER)	65
IESNA RP-1-1993 Compliance	Noncompliant
ANSI/IESNA RP-1-2004 Compliance	Noncompliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$3.69 based on 3000 hrs. and \$0.08 per KWH

#### COEFFICIENTS OF UTILIZATION (%)

RCR	RW	80				70				50				0
		70	50	30	10	70	50	30	10	50	30	10	0	
1	75	72	70	67	74	71	69	66	68	66	64	59		
2	69	64	60	57	68	63	59	56	61	57	55	51		
3	64	57	52	48	62	56	52	48	54	50	47	44		
4	59	51	46	42	57	50	45	41	49	44	41	38		
5	55	46	41	36	53	46	40	36	44	40	36	34		
6	51	42	36	32	49	41	36	32	40	35	32	30		
7	47	38	33	29	46	38	33	29	37	32	29	27		
8	44	35	30	26	43	35	29	26	34	29	26	24		
9	41	32	27	23	40	32	27	23	31	27	23	22		
10	39	30	25	21	38	30	25	21	29	24	21	20		

#### INDOOR CANDELA PLOT

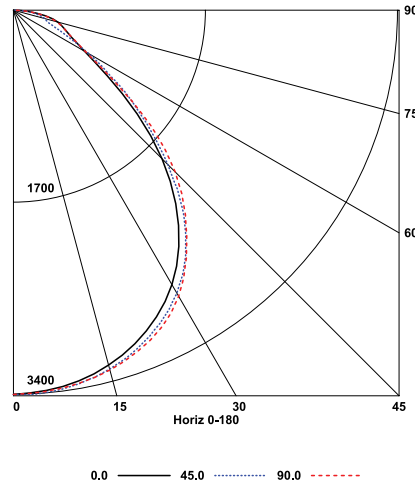


#### AVG. LUMINANCE (Candela/Sq. M.)

	0.0	22.5	45.0	67.5	90.0
0	5835	5835	5835	5835	5835
30	5555	5617	5730	5797	5793
40	5004	5100	5237	5291	5304
45	4512	4565	4689	4822	4912
50	3816	3866	4051	4136	4227
55	3035	3209	3349	3319	3224
60	2490	2641	2631	2665	2545
65	2305	2277	2009	2330	2326
70	2402	2131	1685	2242	2387
75	2697	2167	1895	2253	2638
80	2835	2213	2124	2272	2736
85	2617	2460	2322	2401	2578

RCR = Room Cavity Ratio


RC = Effective Ceiling Cavity Reflectance RW = Wall Reflectance

#### DIMENSIONAL DATA

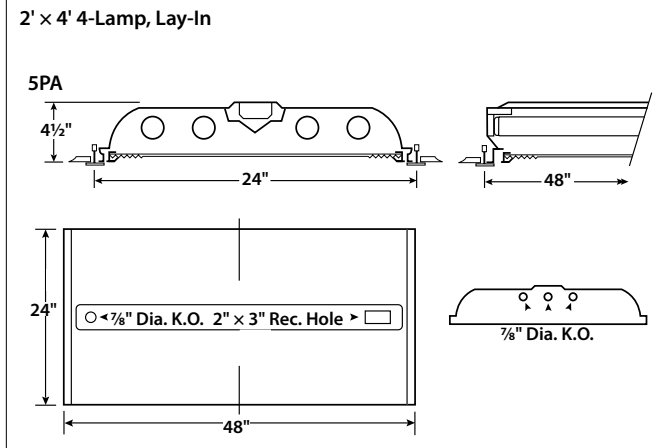


**NOTE:** All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.


#### CEILING COMPATIBILITY




For lay-in installation in exposed grid ceilings. Maximum tee widths of 1" and maximum tee heights of 1 1/2" allowed.



For 3/8" slot grid type ceilings. Louver will be level with the ceiling plane. Shoulder heights of tee or exact slot grid must be specified.



For tile, plaster or plasterboard type ceilings. Overlapping extruded aluminum trim conceals edges of ceiling opening. Wing hanger suspension system included. For row mounting, row information is required.



For metal pan ceilings "Fit-in" style extruded trim aligns with modular tile joints. Fixture is supported from concealed suspension and includes all adjustable wing hangers.

Flange kit rough in dimensions for single unit only: 24 1/8" x 48 1/8"