

FEATURES

- For use with T5 or T5HO lamps
- Staggered strip ideal for cove and uplighting applications requiring small profile and higher lumen output
- Ultra narrow 2" width
- Rotary lock lampholders for positive lamp contact
- Knockouts in end cap and housing back for easy power hook up
- 4" inch lamp overlap provides smooth line of continuous illumination
- Adjustable staggered end of row fixture eliminates dark corners

PROJECT INFORMATION

Project Name _____

Type _____

Catalog No. _____

Date _____

CONSTRUCTION

Heavy gauge cold rolled steel housings fully assembled. Channel cover provides room-side access to ballast. Channel ends offset 4".

CERTIFICATION

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.

FINISH

White painted parts are treated with a five stage phosphate bonding process and finished with a baked enamel.

ELECTRICAL

Standard class "P," thermally protected, auto-resetting HPF ballast, sound rated A. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

ORDERING INFORMATION

EXAMPLE CNSS4-254-EPU

CNSS		-		-		-	
MODEL	SIZE	NO. OF LAMPS IN CROSS SECTION	LAMP TYPE	BALLAST	VOLTAGE	OPTIONS	
CNSS T5 Staggered Strip	2 2' 3 3' 4 4' 8 8'	1 One 2 Two	14 2', T5: 14 Watt 21 3', T5: 21 Watt 24 2', T5HO: 24 Watt 28 4', T5: 28 Watt 39 3', T5HO: 39 Watt 54 4', T5HO: 54 or 51 Watt	EP Electronic T5/T5HO, Programmed Start 4EP 4-Lamp Electronic T5HO, Programmed Start (N/A 347V)	U 120V-277V 347 347V	GLR Fast Blow Fuse GMF Slow Blow Fuse PAF Paint After Fabrication ALUM Aluminum Housing and End Caps	


ACCESSORIES (ORDER SEPARATELY)

- CNSSR4** Symmetric Reflector, 4' CNSS Strip
- CNSSRA4** Asymmetric Reflector, 4' CNSS Strip
- CNSSAR4** Specular Symmetric Reflector, 4' CNSS Strip
- CNSSARA4** Specular Asymmetric Reflector, 4' CNSS Strip


* For 3' reflector, replace 4 with 3. For 2' reflector, replace 4 with 2.

DIMENSIONAL DATA

Individual Lighting Units: 1-Light

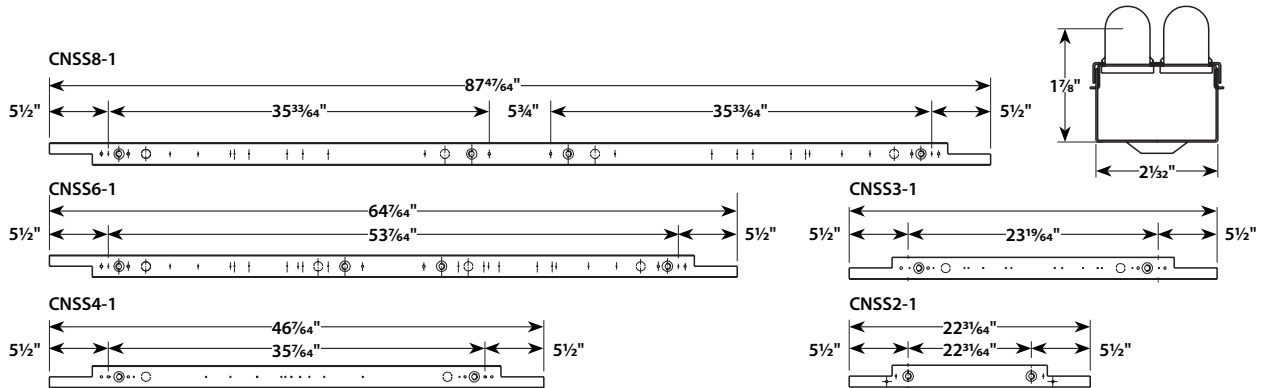

Individual Lighting Units: 2-Light

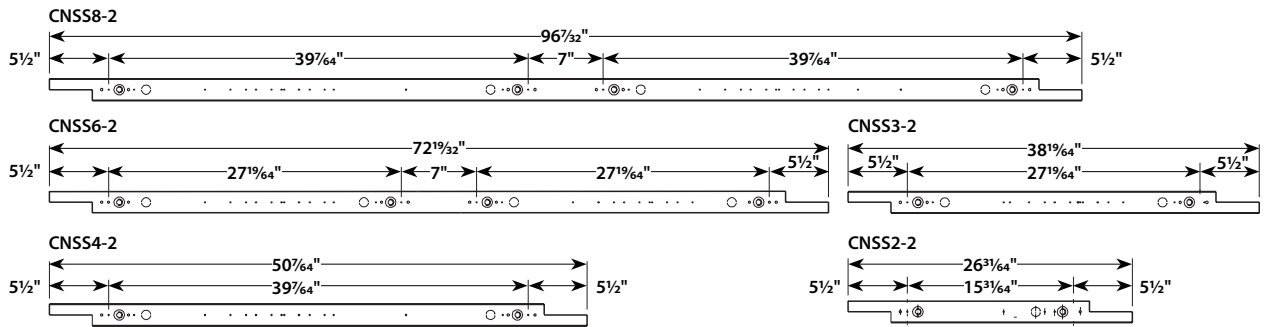

INSTALLED VIEW


1-Light



2-Light



REFLECTORS

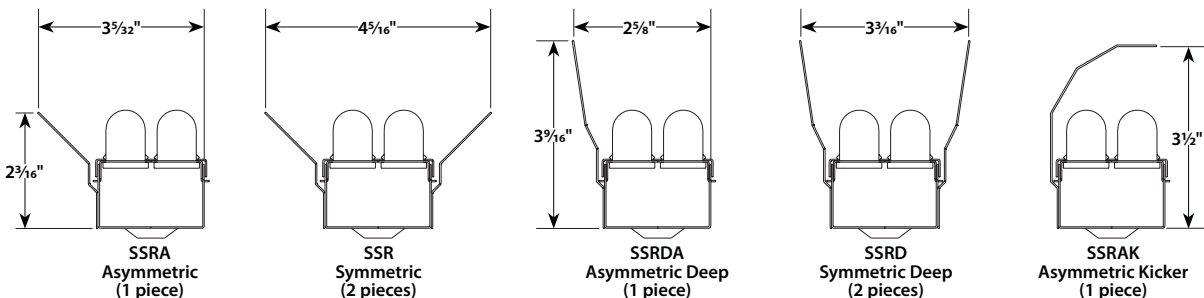

ORDERING GUIDE: Show reflector as option on strip catalog number (example: SSR0W-1T8-EU-10.0-SSRA)

NOTE: Symmetric reflectors consist of two halves. Asymmetric reflectors consist of one half. 2' adjustable housings require 4' reflectors for field adjustment. All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.