


# R400C8xx M08N0A

## APPLICATION and PERFORMANCE SPECIFICATION

**Description:** Constant Current 2 Channel Linear 2' LED Module

- Rated Supply Current : 0.255A
- For use in Class 2 lighting systems
- For use with L3C4C42UNVA-A or L2C4C30UNVA-A
- Two channel LED light source

LED Type		Input Volts	Full Bright							
Type	Ch		Initial Lumens	Nom Current	Power	Lm/W	CCT	CRI	x	y
R400C835M08N0A	2	36.5	1800	0.255	18.7	>95	3500K	>82	0.4053	0.3907
R400C840M08N0A	2	36.5	1800	0.255	18.7	>95	4000K	>82	0.3836	0.3789

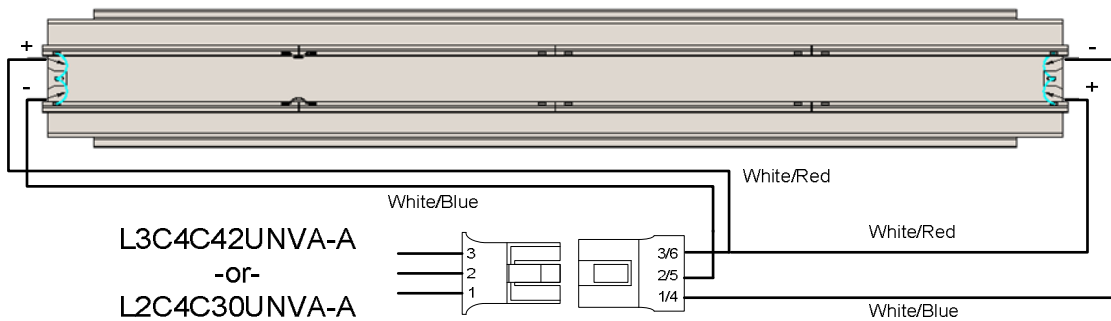

Application and Performance Specification information subject to change without notification.  
Power and flux performance data recorded using LM79 test methods

### Performance:

- Meets 50,000 operating life at L80 lumen maintenance

### Environmental:

- RoHS

### Application:

- Minimum Operating Temperature: -4° F, -20° C
- Maximum Ambient Temperature: 104° F, 40° C
- Maximum Case Temperature [at  $t_c$ ]: 144° F, 62° C
- Remote Mounting: 8 ft. max. lead length, 18 AWG
- Control Range: Between full load & 10% rated power

### Physical Parameters

Length:	22.25"
Width:	3.125"
Height:	0.53"
Weight:	0.625 lbs
Lead Length:	
Wht/Red	32"
Wht/Blu	32"

### Warranty:

Universal Lighting Technologies warrants to the purchaser that each LED module will be free from defects in material or workmanship for a period of 5 years from date of manufacture when properly installed with a ULT LED power supply and under normal conditions of use. Call **1-800-225-5278 x800** for technical assistance.

Manufactured in North America

