

FEATURES

- Baked white enamel finish, painted after fabrication
- Standard T8 fluorescent design
- Diffuser easily removable for lamp access and cleaning
- Heavy gauge steel housing
- Optional grounded convenience outlet

PROJECT INFORMATION

Project Name _____

Type _____

Catalog No. _____

Date _____

FINISH

Painted parts are treated with a five stage phosphate bonding process and finished with a high reflectance baked white enamel.

CERTIFICATION

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard.

BALLASTS

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, sound rated A, magnetic or electronic ballasts. CEE NEMA Premium compliant.

ELECTRICAL

Standard class "P", thermally protected, autoresetting HPF ballast, sound rated A. CEE NEMA Premium compliant. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

ORDERING INFORMATION


EXAMPLE UC18-115-LU-GCO

UC		1		U			
MODEL	SIZE	NO. OF LAMPS	LAMP TYPE	BALLAST	VOLTAGE	OPTIONS	
UC Undercabinet	18 18" long 24 24" long 36 36" long 48 48" long	1 One	15 18", T12: 15 Watt 17 24", T8: 17 Watt 20 24", T12: 20 Watt 25 36", T8: 25 Watt 30 36", T12: 30 Watt 32 48", T8: 32 Watt	Blank HPF, Non-energy Saving L Low Power Factor E Electronic T8, Instant Start	U 120V-277V	F0735 35K, 75CRI, T8 Lamps Installed WSW On-Off Rocker Switch (120V only) GCO Grounded Convenience Outlet (120V only) GLR Fast Blow Fuse	


Fixtures without switches or grounded convenience outlets have knockouts for both for field installation.

PHOTOMETRIC DATA


18" 15 Watt T-12 Lamp

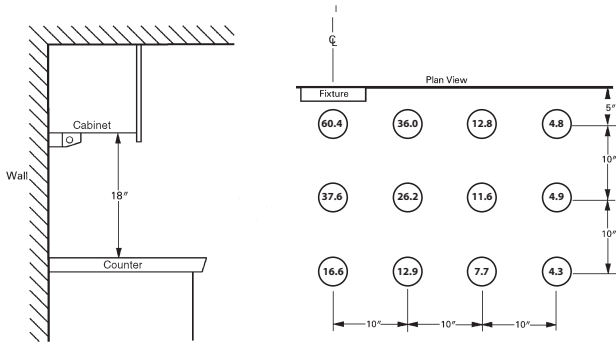


24" 17 Watt T8 Lamp

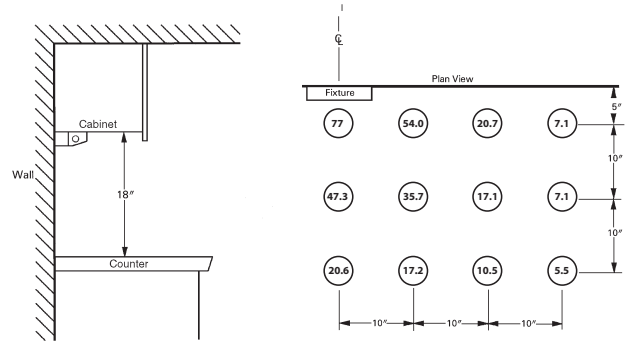

36" 25 Watt T8 Lamp

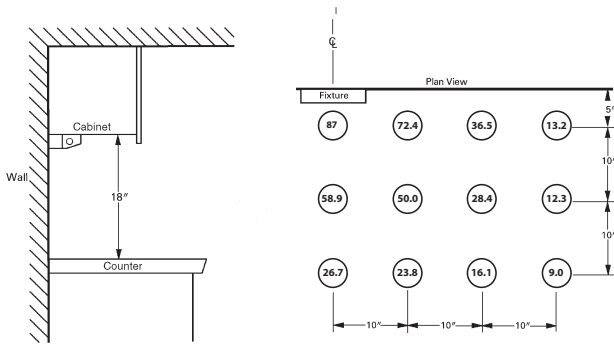

48" 32 Watt T8 Lamp

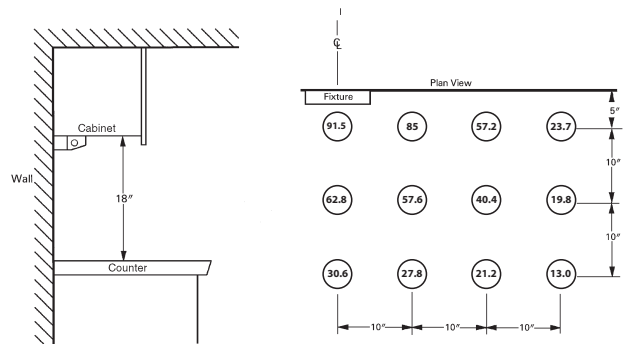

DIMENSIONAL DATA

