

FEATURES

- Ideal for hallways, stairwells, or wall mounting directly above mirror in lavatories
- Housing is a rigid assembly with formed steel wireway channel and die cast aluminum end panels
- One piece, sectionalized extruded acrylic diffuser has linear prismatic downlight for excellent spread, translucent white front for glare control, and partially prismatic linear uplight pattern to direct light away from wall
- Front and top of diffuser has smooth exterior surfaces for easy cleaning
- Oyster powder coat finish painted after fabrication
- Grounded convenience outlet and pull chain switch optional on 120V models.

PROJECT INFORMATION

Project Name _____

Type _____

Catalog No. _____

Date _____

CONSTRUCTION

Heavy code gauge cold rolled steel housing and ballast cover. Embossed Housing for rigidity. Endcaps are die cast aluminum.

FINISH

Painted parts are treated with a five stage phosphate bonding process and finished with a high reflectance baked white enamel.

BALLASTS

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, sound rated A, magnetic or electronic ballasts. CEE NEMA Premium compliant.

SHIELDING

One piece acrylic diffuser. Bottom of diffuser has longitudinal linear prisms for controlled direct illumination. Top of diffuser has partially prismatic pattern to direct light away from wall and into space. Front of diffuser is translucent white for glare control.

ELECTRICAL

Standard class "P", thermally protected, autoresetting HPF ballast, sound rated A. CEE NEMA Premium compliant. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

CERTIFICATION

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.


ORDERING INFORMATION

EXAMPLE WPM4-232-EU

WPM		-		2		-					
MODEL	SIZE	NO. OF LAMPS	LAMP TYPE	BALLAST	VOLTAGE	OPTIONS					
WPM Spec Grade Wall Bracket	2 2' 3 3' 4 4'	2 Two	17 2', T8: 17 Watt 25 3', T8: 25 Watt 32 4', T8: 32 Watt	E Electronic, T8, Instant Start EP Electronic, T8, Programmed Start	U 120V-277V 120 120V 277 277V 347 347V	GLR Fast Blow Fuse EL Emergency Battery Pack PSW Pull Chain Switch (120V only) GCO Grounded Convenience Outlet (120V only) NL Candelabra Base Incandescent Night Light					

PHOTOMETRIC DATA - CONTACT FACTORY

DIMENSIONAL DATA

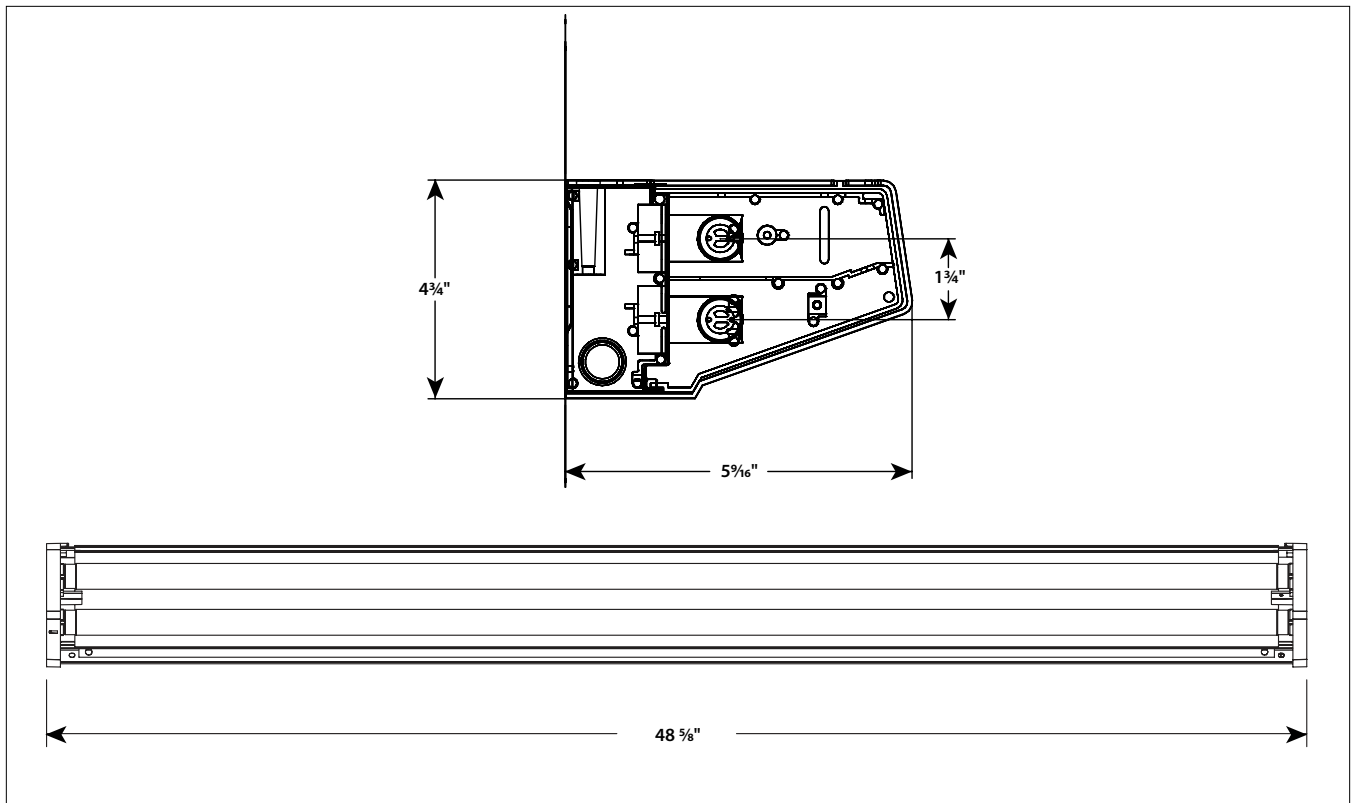

NOTE: All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.

Page 2/2 Rev. 03/05/12

SURFACE / WPM