

FEATURES

- Internal retrofit package to convert outdated fixtures to high efficiency lighting using the latest linear fluorescent lighting technologies
- Retains existing housing and shielding
- Kits are available to retrofit 2' x 2' or 2' x 4' fixtures with T8 lamps
- Installs with simple hand tools
- Standard kits include: reflector, prewired ballast and sockets, socket brackets, and optional bulk lamps
- Optional reflector materials available: 91% reflective gloss white or 95% reflective specular
- Reflector extends the width and length of the fixture interior to maximize light output
- Energy savings up to 46% compared to 3-lamp or 4-lamp T12 magnetic systems, while maintaining existing light levels



ORDERING INFORMATION

RKT					U	
MODEL	NO. OF LAMPS IN CROSS SECTION	REFLECTOR TYPE	VOLTAGE	OPTIONS		
RKT Retrofit Kit Lens Troffer	2 Two 3 Three	GW Gloss White, 91% Reflective M4R Enhanced Specular Aluminum, 95% Reflective	U 120V-277V	GTS Hi-Lo Control, Single Circuit Toggle Switch (used for Step Dimming Ballast) (Required when no ballast is supplied) IS8 Instant Start T8 Sockets PS8 Programmed Start T8 Sockets		


SIZE	LAMP TYPE	BALLAST
22 2' x 2'	17 2', T8: 17 Watt	NOTE: See Technical Section for other ballast options.
24 2' x 4'	32 4', T8: 32, 30, 28 or 25 Watt	ELW Electronic T8, Instant Start, 0.77 Ballast Factor E Electronic T8, Instant Start, 0.88 Ballast Factor E104 Electronic T8, Instant Start, 1.04 Ballast Factor EHL Electronic T8, Instant Start, 1.18 Ballast Factor ESD Electronic T8, Step Dimming, Programmed Start, 0.88 Ballast Factor EP Electronic T8, Programmed Start, 0.88 Ballast Factor 3ELW 3-Lamp Electronic T8, Instant Start, 0.77 Ballast Factor 3E 3-Lamp Electronic T8, Instant Start, 0.88 Ballast Factor 3EHL 3-Lamp Electronic T8, Instant Start, 1.04 Ballast Factor 3EP 3-Lamp Electronic T8, Programmed Start, 0.88 Ballast Factor Blank No Ballast supplied (Please specify socket type under options)

ACCESSORIES (ORDER SEPARATELY)

- RKF32T8830** T8 32 Watt Lamps, F0830, 85CRI, 3000K, order in case quantity only (25)
- RKF32T8835** T8 32 Watt Lamps, F0835, 85CRI, 3500K, order in case quantity only (25)
- RKF32T8841** T8 32 Watt Lamps, F0841, 85CRI, 4100K, order in case quantity only (25)
- RKF54T5835** T5H0 54 Watt Lamps, F5835, 85CRI, 3500K, order in case quantity only (40)
- RKF54T5841** T5H0 54 Watt Lamps, F5841, 85CRI, 4100K, order in case quantity only (40)

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN FIXTURE	LAMP TYPE
2' x 2'	2, 3	2, 3	17
2' x 4'	2, 3	2, 3	32

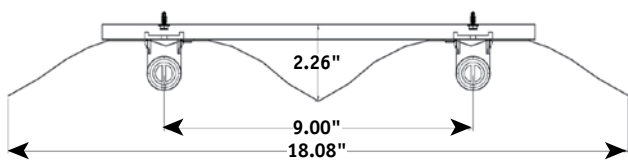

2-Lamp Cross Section