



FEATURES

- Internal retrofit package to convert outdated fixtures to high efficiency lighting using the latest linear fluorescent lighting technologies
- Retains existing housing and shielding
- Kits are available to retrofit 2' x 2' or 2' x 4' fixtures with T8 lamps
- Installs with simple hand tools
- Standard kits include: reflector, prewired ballast and sockets, socket brackets, and optional bulk lamps
- Optional reflector materials available: 91% reflective gloss white or 95% reflective specular
- Reflector extends the width and length of the fixture interior to maximize light output
- Energy savings up to 46% compared to 3-lamp or 4-lamp T12 magnetic systems, while maintaining existing light levels

ORDERING INFORMATION

RKT					U	
MODEL RKT Retrofit Kit Lens Troffer	NO. OF LAMPS IN CROSS SECTION 2 Two 3 Three	REFLECTOR TYPE GW Gloss White, 91% Reflective M4R Enhanced Specular Aluminum, 95% Reflective	VOLTAGE U 120V-277V	OPTIONS GTS Hi-Lo Control, Single Circuit Toggle Switch (used for Step Dimming Ballast) (Required when no ballast is supplied) IS8 Instant Start T8 Sockets PS8 Programmed Start T8 Sockets		
SIZE 22 2' x 2' 24 2' x 4'	LAMP TYPE 17 2', T8: 17 Watt 32 4', T8: 32, 30, 28 or 25 Watt	BALLAST				

NOTE: See Technical Section for other ballast options.


- ELW** Electronic T8, Instant Start, 0.77 Ballast Factor
- E** Electronic T8, Instant Start, 0.88 Ballast Factor
- E104** Electronic T8, Instant Start, 1.04 Ballast Factor
- EHL** Electronic T8, Instant Start, 1.18 Ballast Factor
- ESD** Electronic T8, Step Dimming, Programmed Start, 0.88 Ballast Factor
- EP** Electronic T8, Programmed Start, 0.88 Ballast Factor
- 3ELW** 3-Lamp Electronic T8, Instant Start, 0.77 Ballast Factor
- 3E** 3-Lamp Electronic T8, Instant Start, 0.88 Ballast Factor
- 3EHL** 3-Lamp Electronic T8, Instant Start, 1.04 Ballast Factor
- 3EP** 3-Lamp Electronic T8, Programmed Start, 0.88 Ballast Factor
- Blank** No Ballast supplied (Please specify socket type under options)

ACCESSORIES (ORDER SEPARATELY)

- RKF32T8830** T8 32 Watt Lamps, F0830, 85CRI, 3000K, order in case quantity only (25)
- RKF32T8835** T8 32 Watt Lamps, F0835, 85CRI, 3500K, order in case quantity only (25)
- RKF32T8841** T8 32 Watt Lamps, F0841, 85CRI, 4100K, order in case quantity only (25)
- RKF54T5835** T5HO 54 Watt Lamps, F5835, 85CRI, 3500K, order in case quantity only (40)
- RKF54T5841** T5HO 54 Watt Lamps, F5841, 85CRI, 4100K, order in case quantity only (40)

PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS IN CROSS SECTION	NO. OF LAMPS IN FIXTURE	LAMP TYPE
2' x 2'	2, 3	2, 3	17
2' x 4'	2, 3	2, 3	32

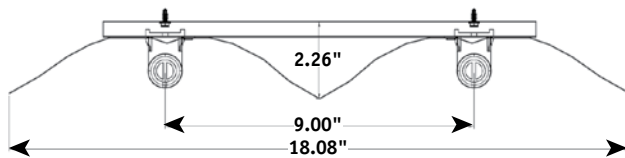

2-Lamp Cross Section